


## Tubular Handle Sets



**NY (New York Tubular)**



**MH (Manhattan Tubular)**

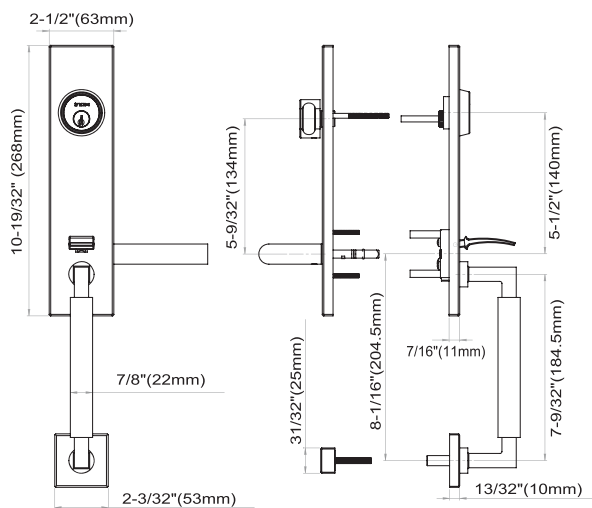

### Specifications

- Door Thickness: 1-3/4" (44mm) standard
- Thick Door Kits available
- Backset: 2-3/8" (60mm) standard  
2-3/4" (70mm) available
- Handing: Please Specify
- Center Distance: Lever to Cylinder 5-1/2" (140mm)
- Cylinder & Keys: 5-pin Schlage C keyway with 2 keys
- Leverset Thru-Bolts: 2 each M4x35mm
- Deadbolt Thru-Bolts: 2 each M5x50mm

### Application

- For residential entry, multi-family unit entry

### Material

- Stainless Steel Levers and Escutcheons

### Finish



Satin Stainless Steel (32D)

Bright Polished Stainless Steel (32)

Two-tone Stainless Steel (SP)  
Polished on lever neck, inside plate, outside plate, and handgrip; Satin on lever grip

Oil Rubbed Bronze on Stainless Steel (10B)



Graphite Black (19G)




Satin Brass (PVD4)

Finish options vary from lever to lever; see [inoxproducts.com](http://inoxproducts.com) for more information

### Functions

#### Entrance (C563/C573)

- Deadbolt is locked or unlocked by key
- Latchbolt is retracted by thumb-piece from outside or lever from inside
- Deadbolt and latch are not interconnected

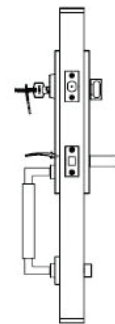

#### Entry Dummy (TDP)

- Trim with rim dummy cylinder outside, dummy plate escutcheon inside

